


GENERATING SET

GE NEF 83M

NEF

The Iveco Motors Diesel generating sets of the NEF family cover a power range from 30 to 220 kVA.

The product catalog includes open and soundproofed units for standard applications and rental, coupled to electronic control systems for manual and automatic control panels, for paralleling or other special systems produced according to the specific requirements of the customer.

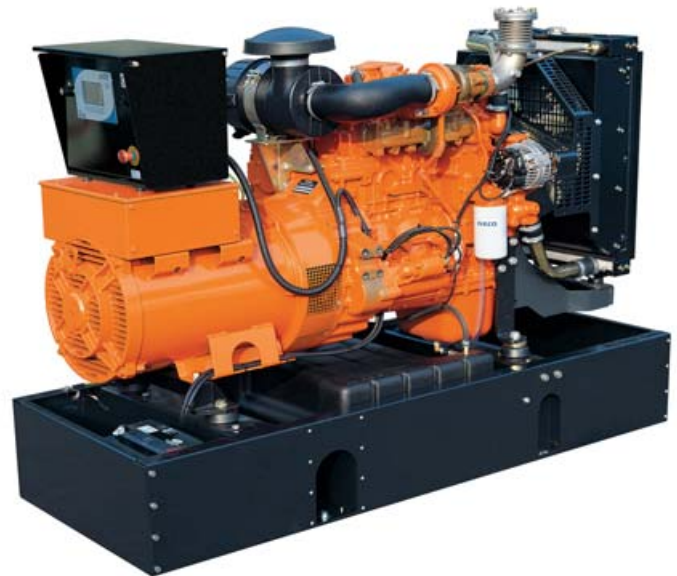

PERFORMANCES

RATINGS ¹⁾	GE NEF 83 50 Hz		GE NEF 83 60 Hz	
	kVA	kWe ²⁾	kVA	kWe ³⁾
PRIME	83	66	100	80
STAND-BY	90	73	109	88

1) Ratings in accordance with ISO 8528 - The nominal power are available after 50 hours running with $\pm 3\%$ tolerance. The indicated power may change in function of the utilized alternator. For duty at temperature over 40°C and/or altitude over 1000 meters must be considered a power derating factor. Contact the Iveco Motors sales organization.

2) Power factor 0.8.

PRIME POWER

The Prime Power is the maximum power available with varying loads for an unlimited number of hours. The average power output during a 24 h period of operation must not exceed 80% of the declared prime power between the prescribed maintenance intervals and at standard environmental conditions. A 10% overload is permissible for 1 hour every 12 hours of operation.

STAND-BY POWER

This is the maximum power available for a period of 500 hours/year with a mean load factor of 90% of the declared stand-by power. No kind of overload is permissible for this use.

CONTINUOUS POWER

Contact the Iveco Motors sales organization.

TECHNICAL DATA

Engine model	NEF45 SM5 - Mechanical	Frequency	50 Hz	60 Hz
Nb of cylinders	4, in line	Fuel consumption at :		
Total displacement	liters 4.5	100% load	l/h (g/kWh) 18.8 (214.2)	22.6 (215.5)
Aspiration	turbocharged	80% load	l/h (g/kWh) 14.0 (212.1)	16.8 (216.0)
Cooling system	liquid (water + 50% Paraflu11)	50% load	l/h (g/kWh) 9.5 (214.1)	11.4 (225.9)
Lube oil consumption	< 0,1% of fuel consumption	Available voltages :	consult the documentation of the alternator.	
Genset dimensions (L x W x H)	mm 2303 x 730 x 1475	Dry weight with standard accessories	kg	~ 1110
		(may change in function of the alternator)		

**IVECO
MOTORS**

FPT
POWERTRAIN TECHNOLOGIES

STANDARD CONFIGURATION

1. ENGINE DRIVE

IVECO MOTORS heavy duty diesel engine.
Performances in accordance with ISO 8528, G2 class.

2. COOLING SYSTEM

Radiator and pusher fan dimensioned for tropical climates. The radiator is fixed to the engine and is equipped with adequate security protection guards.

3. FILTRATION SYSTEM

The engine is equipped with: dry air filter complete of security element, cartridge fuel filters with water separator and oil filter.
All filters have replaceable cartridges.

4. EXHAUST SYSTEM

Industrial application exhaust silencers are supplied on request.

5. ELECTRICAL SYSTEM

12 Volt system with battery charging alternator. Starter motor. High performance maintenance free lead acid battery (on request). Battery rack mounted on the generating set base frame.

6. ALTERNATOR

Single bearing synchronous brushless alternator, four poles, mechanical protection degree IP21 and H class insulation. Tropical climates impregnation; on request, humid and corrosive climates treatment. All alternators are equipped with electronic voltage regulator and meet the following standards : IEC34, CEI2-3, BS4999-5000, VDE0530, EN60034-1, NF51-100, CSA C22-2, OVE M10, NEMA MG1-22 .

7. MOUNTING ARRANGEMENT

7.1 Base Frame

The complete generating set is mounted on a modern design and high quality steel fabricated base frame. In the catch all base frame are located the fuel tank and the batteries. Anti vibration pads are fitted between engine-alternator and base frame ensuring complete vibration isolation of rotating assemblies.

7.2 Coupling

Engine and alternator are directly coupled.

8. FUEL SYSTEM

Thermoplastic fuel tank with a total capacity of 180 liters is provided on the base frame. The fuel tank is equipped with a visual fuel level indicator. Oversized fuel tanks and special certified fuel tanks with automatic refill are available on request.

9. CONTROL PANEL

Manual and Automatic control panels are available in different configurations.

10. OPTIONS

Generating set can be supplied with different options to meet the specific requirements of the customer .

11. DOCUMENTATION

A full set of operation and maintenance manuals are provided with each unit.

12. FACTORY TESTS

Generating set is subject to a strict load test before delivery. A test certificate can be provided on request.

Iveco Motors - FPT

Via Puglia, 15 - 10156 Torino IT
Tel. +39 (011) 0076245 - Fax +39 (011) 0076275

Iveco Motors - FPT

V.le dell'Industria, 15/17- 20010 Pregnana Mil.se Milano IT
Tel. +39 (02) 935101 - Fax +39 (02) 93590029

www.ivecomotors.com

2H Energy

Z.I. de Babeuf - Saint Leonard - 76400 Fécamp - FR
Tel. +33 (0) 235106800 - Fax +33 (0) 235106810

Local distributor

FENK

J.B.Alberdi 7138 - Cap.Fed. - Argentina
Tel: +54 11 4687-0000