




10 years warranty

# Tile roof solar mounting system

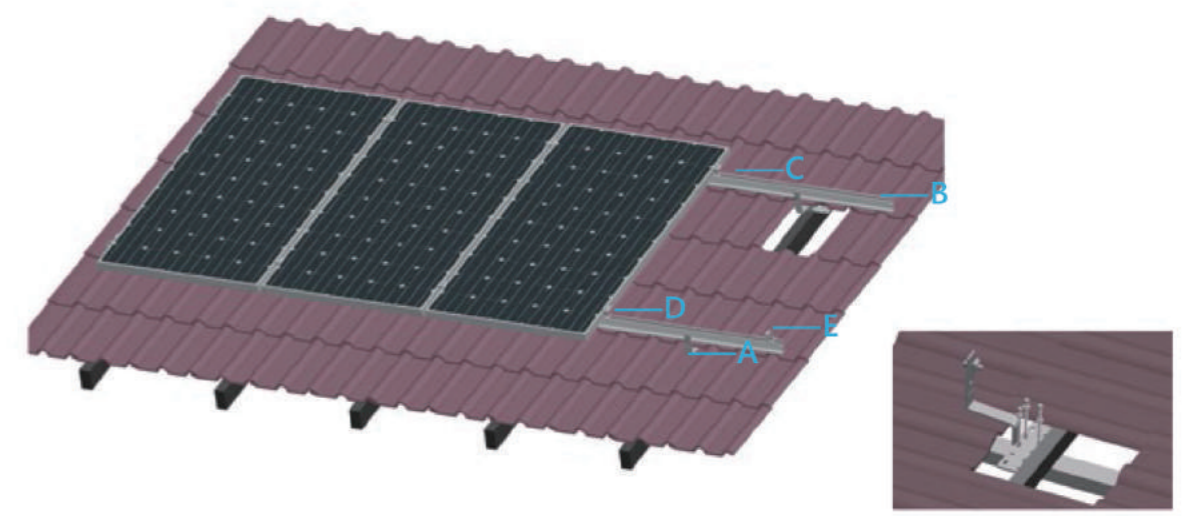

## Features

Application	Pitched roof
Roof Slope	Up to 45°
Building height	Up to 20m
Roof cladding	Suitable for most types of cladding
Wind speed	Up to 88m/s(316.8kmh/196.9mph)
PV module	Framed, unframed
Module orientation	Landscape, portrait
Material	Anodized aluminum 6005 T6 stainless steel 304
Standard	AS/NZ1170.2:2011, JIS C 8955:2011

Flexible, simple  
clean on  
different tile roofing

## Components



A : Tile roof hook



B : Rail




C : Rail splice



D : Inter clamp



E : End clamp



Side view

The tile roof solar mounting system offers perfect solution for installation on tile roofing, the roof fastening is done using highly-resistant stainless steel roof hooks, which is suitable for nearly all coverings, such as pantile, plain tiles, slate tiles. Systems are fully compliant with the Australian and other international standards on wind & snow load, making it suitable for a wide variety of climatic zones.