




LS600-20-5 SM LS600-2001 SM LS600-2002 SM LS600-2003 SM	LS600-20-5 N LS600-2001 N LS600-2002 N LS600-2003 N	LS600-2003 LS600-2005 LS600-4003 LS600-4005	LS600-2007 LS600-2010 LS600-2015 LS600-4007 LS600-4010 LS600-4015	LS600-2020 LS600-2025 LS600-2030 LS600-4020 LS600-4025 LS600-4030	LS600-2040 LS600-2050 LS600-4040 LS600-4050	LS600-2060 LS600-2075 LS600-4060 LS600-4075 LS600-4100
LS600-20-5 SN LS600-2001 SN LS600-2002 SN LS600-2003 SN	LS600-40-5 N LS600-4001 N LS600-4002 N LS600-4003 N					

Model	LS600-20-5 SM	LS600-2001 SM	LS600-2002 SM	LS600-2003 SM	LS600-20-5 SN	LS600-2001 SN	LS600-2002 SN	LS600-2003 SN	LS600-20-5 N	LS600-2001 N	LS600-2002 N	LS600-2003 N	LS600-2005	LS600-2007	LS600-2010	LS600-2015	LS600-2020	LS600-2025	LS600-2030	LS600-2040	LS600-2050	LS600-2060	LS600-2075	LS600-2080	
Max. Motor(kw)	0.4	0.75	1.5	2.2	0.4	0.75	1.5	2.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	
Capacity (KVA)	1.2	1.7	2.8	4.2	1.2	1.7	2.8	4.2	1.2	1.7	2.8	4.2	6.1	9.1	12.2	17.5	23	29	34.7	44	55	67	82	110	
Rated Current(A) of Inverters	3.0	4.5	7.5	11	3.0	4.5	7.5	11	3.0	4.5	7.5	11	16	24	33	46	61	76	90	115	145	175	215	280	
Dimension Chart	A	A	A	A	A	A	A	A	A	A	A	A	B	C	C	C	D	D	D	D	D	D	D	D	E
Power Source	Rated voltage & Frequency		Single phase 200V / 208V / 220V 50Hz 200V / 208V / 220V / 240V 60Hz										Three phase 200V / 208V / 220V 50Hz 200V / 208V / 220V / 240V 60Hz												
	All voltage variance		± 10%																						

380V-460V Series

Model	LS600-40-5N	LS600-4001N	LS600-4002N	LS600-4003N	LS600-4005	LS600-4007	LS600-4010	LS600-4015	LS600-4020	LS600-4025	LS600-4030	LS600-4040	LS600-4050	LS600-4060	LS600-4075	LS600-4100
Max. Motor(kw)	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75
Capacity (KVA)	1.4	2.0	3.2	4.2	7.0	9.5	13	18	23.5	29	33	48	53	68	84	110
Rated Current(A) of Inverters	1.8	3.2	4.5	7.0	9.0	12	17	23	30	38	43	58	70	85	110	150
Dimension Chart	A	A	A	A	B	C	C	C	D	D	D	E	E	F	F	F
Power Source	Rated voltage & Frequency		Three phase 380V / 400V / 415V / 440V / 460V / 50Hz, 60Hz													
	All voltage variance		± 10%													

LS 600-2001 SM

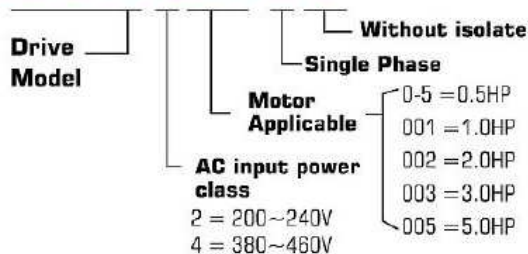

LS 600-2001 SN

